

HMF 6020-K





- power to lift.



HMF 6020-K

Krangruppe B3		6020-OK2	6020-OK3	6020-OK4	6020-OK5	6020-OK6	6020-K6	6020-K7	6020-K8
Lastmoment	tm	56,6	55,1	54,1	53,4	52,7	52,9	52,3	51,6
Hydraulisk rækkevidde	m	8,3	10,4	12,4	14,7	17,0	15,8	18,2	20,6
Svingmoment	kgm	7000	7000	7000	7000	7000	7000	7000	7000
Drejevinkel	°	kont.	kont.	kont.	kont.	kont.	kont.	kont.	kont.
Højde over chassis	mm	2425	2425	2425	2425	2425	2425	2425	2425
Bredde, sammenfoldet	mm	2500	2500	2500	2500	2500	2500	2500	2500
Længde uden ekstraventiler	mm	1325	1325	1325	1325	1325	1460	1460	1460
Støttebensbredde, standard	mm	6325	6325	6325	6325	6325	8420	8420	8420
Støttebensbredde, lang	mm	8420	8420	8420	8420	8420	6325	6325	6325
Vægt ekskl. støtteben	kg	4415	4715	5015	5285	5525	5465	5665	5865
Vægt, standardstøtteben	kg	700	700	700	700	700	700	700	700
Arbejdstryk	MPa	35,0	35,0	35,0	35,0	35,0	35,0	35,0	35,0
Pumpeydelse	l/min	1 x 80 / 1 x 120 / 2 x 65 / 2 x 110							
Oliemængde i separat tank	l	210-420							
Effekt	kW	48-122							
Kroghøjde 1,5 m fra søjle	m	3,2	3,1	3,0	2,9	2,8	3,1	2,8	2,8


HMF 6020-K6

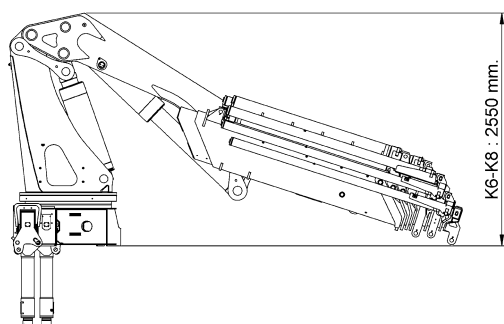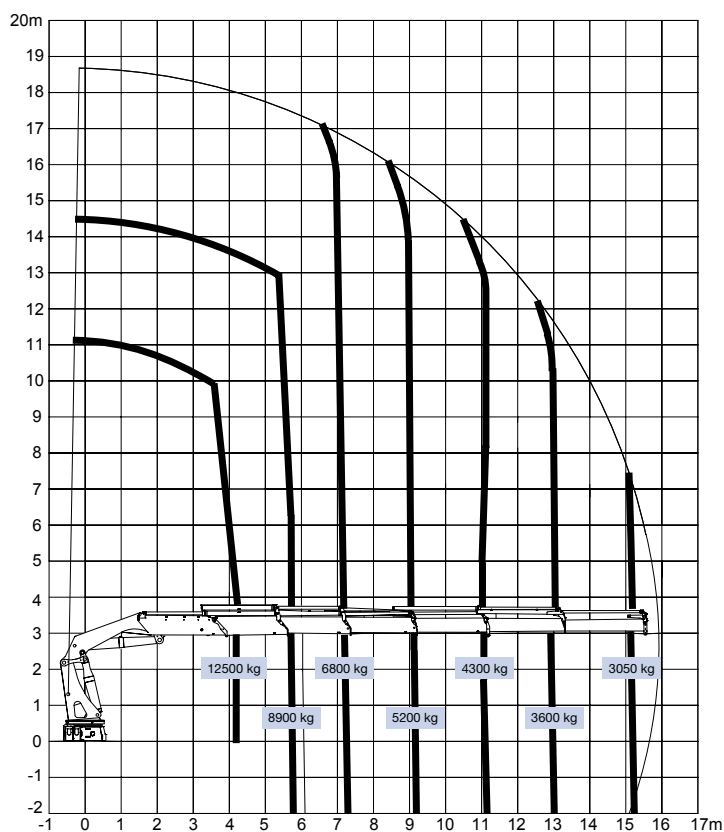

HMF 6020-K8




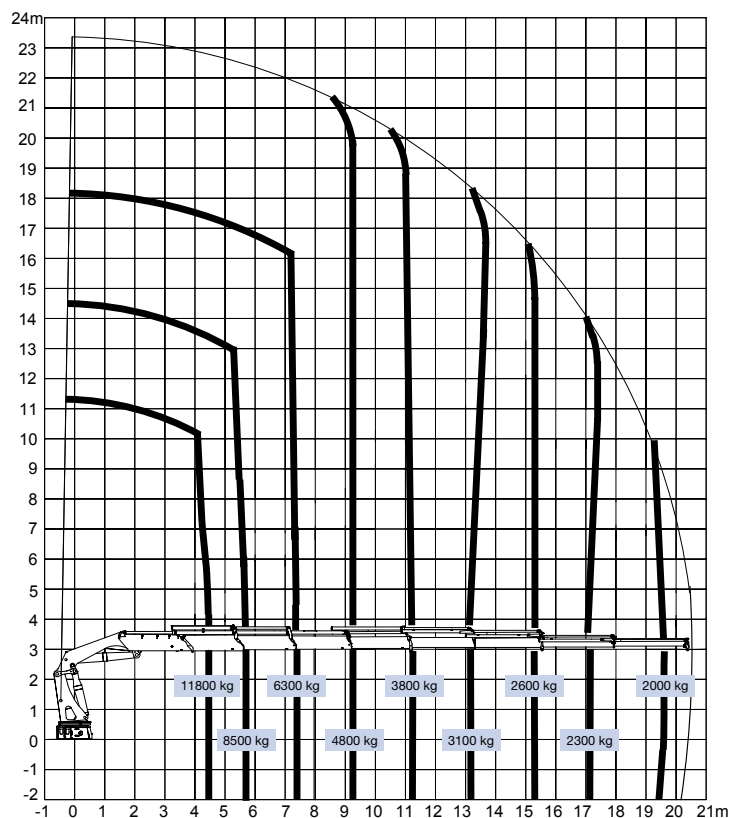


HMF 6020-K6
HMF 6020-K8



HMF 6020-K6
+ FJ 1200-K6

6020-OK6 + FJ1200-K6

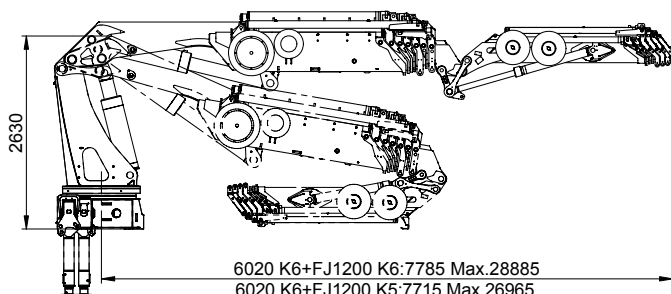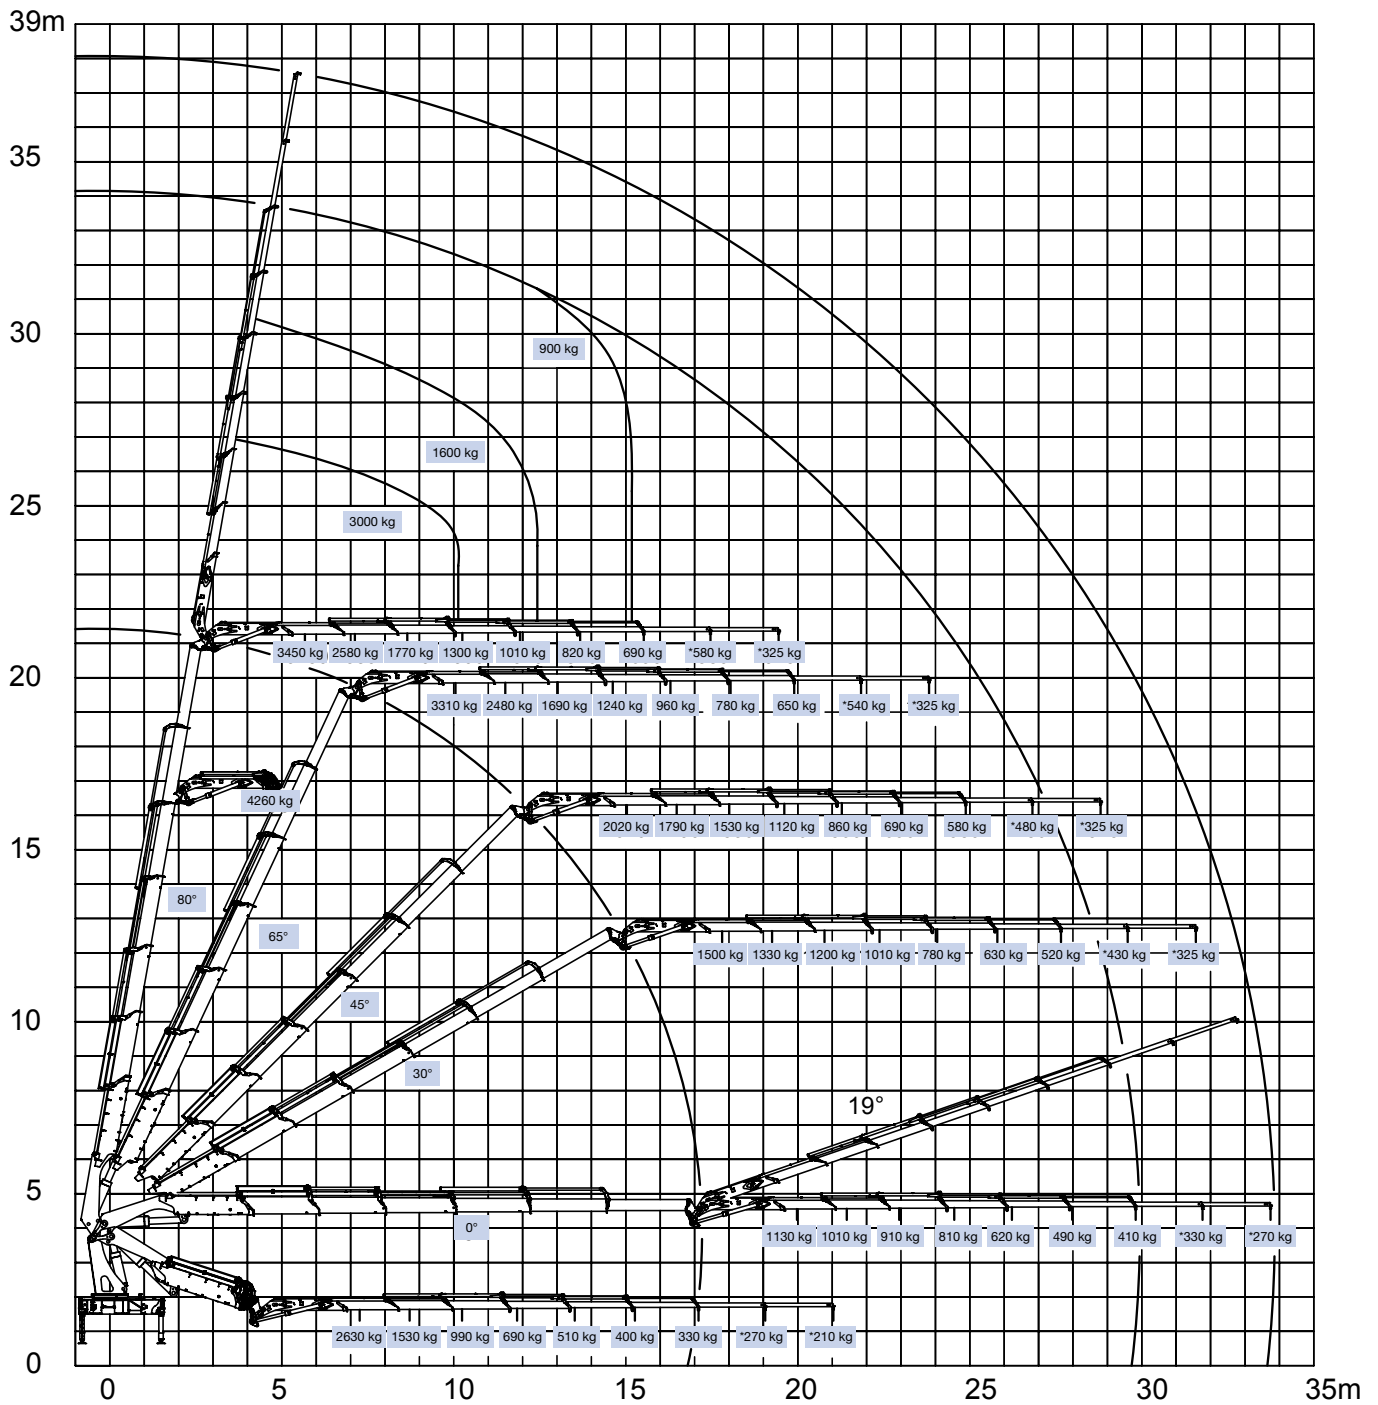


- power to lift.


HMF 6020-K




HMF 6020-OK2

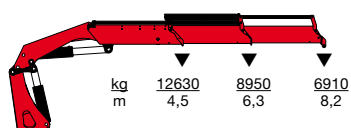


HMF 6020-OK3




HMF 6020-OK4




HMF 6020-OK5




HMF 6020-OK6




HMF 6020-K6



HMF 6020-K7

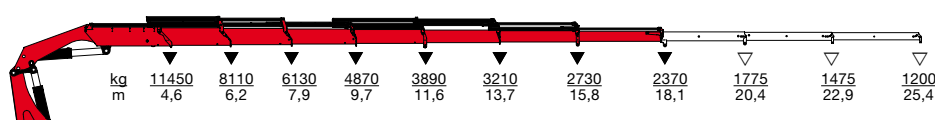

HMF 6020-K8



▽ Løftekapacitet uden manuelle forlængerarme
▼ Løftekapacitet med manuelle forlængerarme

Z008458-2

Ret til ændringer forbeholdes



Højbjerg Maskinfabrik A/S • Oddervej 200 • DK-8270 Højbjerg
Tel.: +45 8627 0800 • Fax: +45 8627 0744 • info@hmf.dk

www.hmf.dk